


STANDARD DESIGN TYPICAL HOUSE SERVICE LOCATION DETAILS

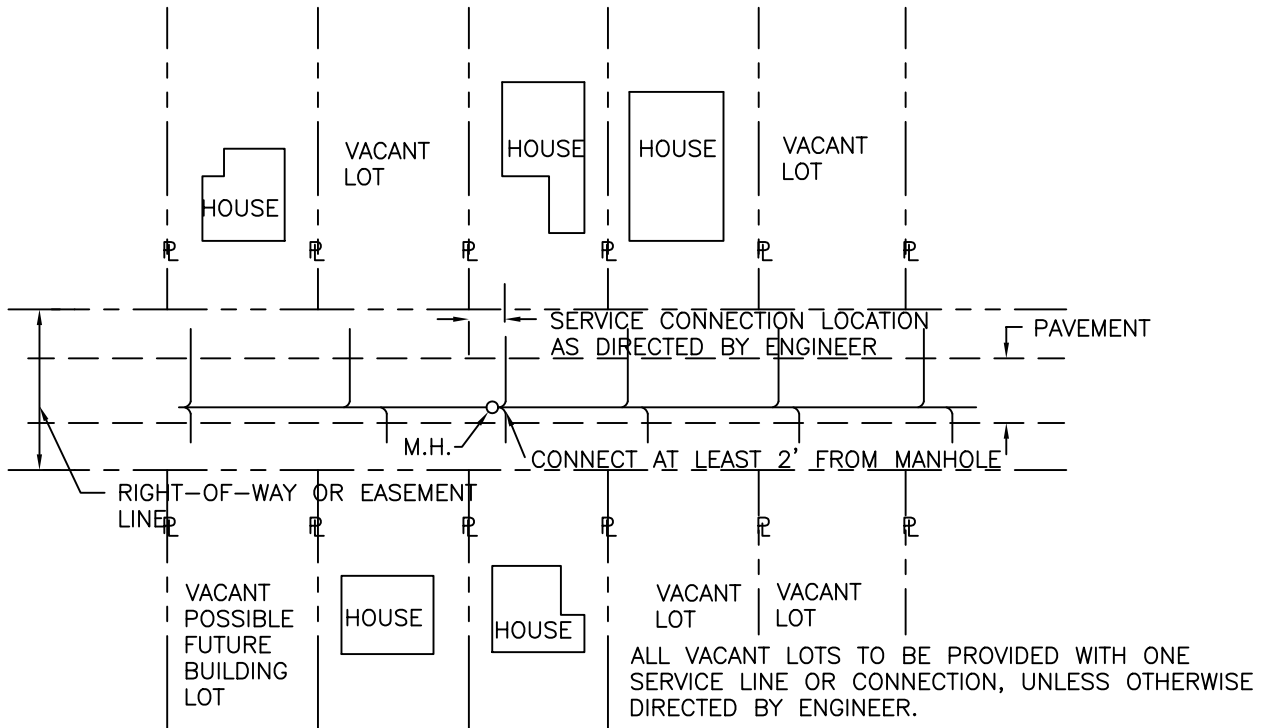

TYPICAL DETAIL-SERVICE CONNECTIONS

NOTES:

1. SERVICE LINE TO EXTEND AS SHOWN ON DETAIL AND PLAN SHEETS, EXACT LOCATION OF SERVICES AND "Y" BRANCHES TO BE ESTABLISHED DURING CONSTRUCTION.
2. SERVICE LINES TO BE LAID AT NOT LESS THAN 1.0% GRADE.
3. ALL "Y" BRANCHES (FUTURE CONNECTIONS) AND LATERAL SERVICE LINES SHALL BE PLUGGED WITH WATERTIGHT STOPPERS.
4. SERVICE LINES SHALL BE A MINIMUM 4" DIAMETER.
5. SERVICE SHALL BE EXTENDED TO WITHIN 1' TO 3' OF THE PROPERTY LINE IN ALLEYS AND STREETS. EXTENSION SHALL NOT BE REQUIRED IN EASEMENTS UNLESS SO DESIGNATED ON THE PLANS.
6. ALL TRENCHES UNDER OR WITHIN 2' OF AN EXISTING OR PROPOSED PAVED SURFACE SHALL BE BACKFILLED WITH TRENCH BACKFILL MATERIAL.
7. INSTALLATION DETAILS SHOWN ON STANDARDS #2060 AND #2070.
8. HOUSE LATERAL SHALL NOT OUTFALL INTO MANHOLES.

CITY OF DECATUR, ILLINOIS
DEPARTMENT OF ENGINEERING
& INFRASTRUCTURE

ADOPTED JANUARY 1, 2003


DIRECTOR OF ENGINEERING & INFRASTRUCTURE

ISSUED: 7-3-01	
REVISIONS	
BY	DATE
K.G.Q.	4/6/00
JMM	5/01/02

STANDARD# 2080