

STANDARD DESIGN OFFSET INLET SPECIAL

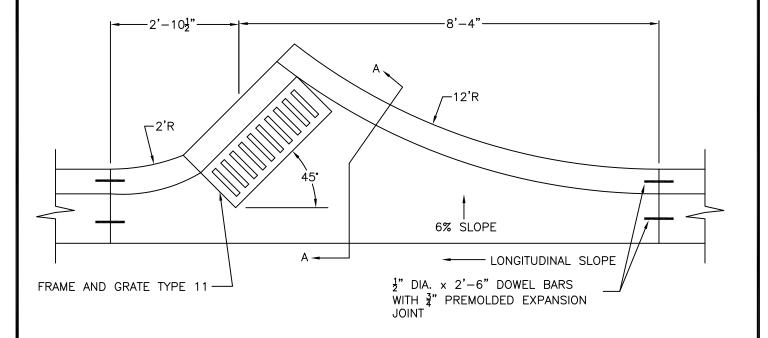

PLAN

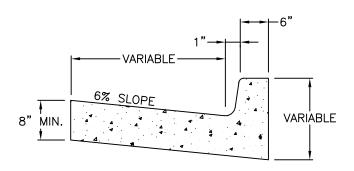

SECTION A-A

NOTES:

- CONSTRUCTION JOINTS OF A TYPE SIMILAR TO THAT USED IN THE ADJACENT PAVEMENT SHALL BE INSTALLED IN THE OUTLET SPECIAL IN PROLONGATION WITH THE PAVEMENT JOINTS.
- 2. CLASS "SI" CONCRETE SHALL BE USED THROUGHOUT.
- 3. IF CONTRACTION JOINTS ARE NOT PROVIDED IN THE PAVEMENT, CONTRACTION JOINTS ARE NOT REQUIRED IN THE OFFSET INLET SPECIAL.
- 4. TO BE USED WHERE LONGITUDINAL GRADE OF STREET EXCEEDS 2% OR IN SPECIAL CASES WHERE INCREASED EFFICIENCY IS REQUIRED.

CITY OF DECATUR, ILLINOIS
DEPARTMENT OF ENGINEERING
& INFRASTRUCTURE

ADOPTED JANUARY 1. 2003

DIRECTOR OF ENGINEERING & INFRISTRUCTURE

ISSUED: 7-3-78
REVISIONS
BY DATE
F.W.T. 12/15/81
SHOE 9/15/89
JMM 11/5/02

K:\CVCEngineer\eng-data\AUTOCAD\STANDARD\Standards 2003\Stdr3060.dwg\Wed, 30 Apr 2003 - 11:32am

STANDARD 3060