


STANDARD DESIGN TYPICAL LATERAL REPAIR IN CITY R.O.W.

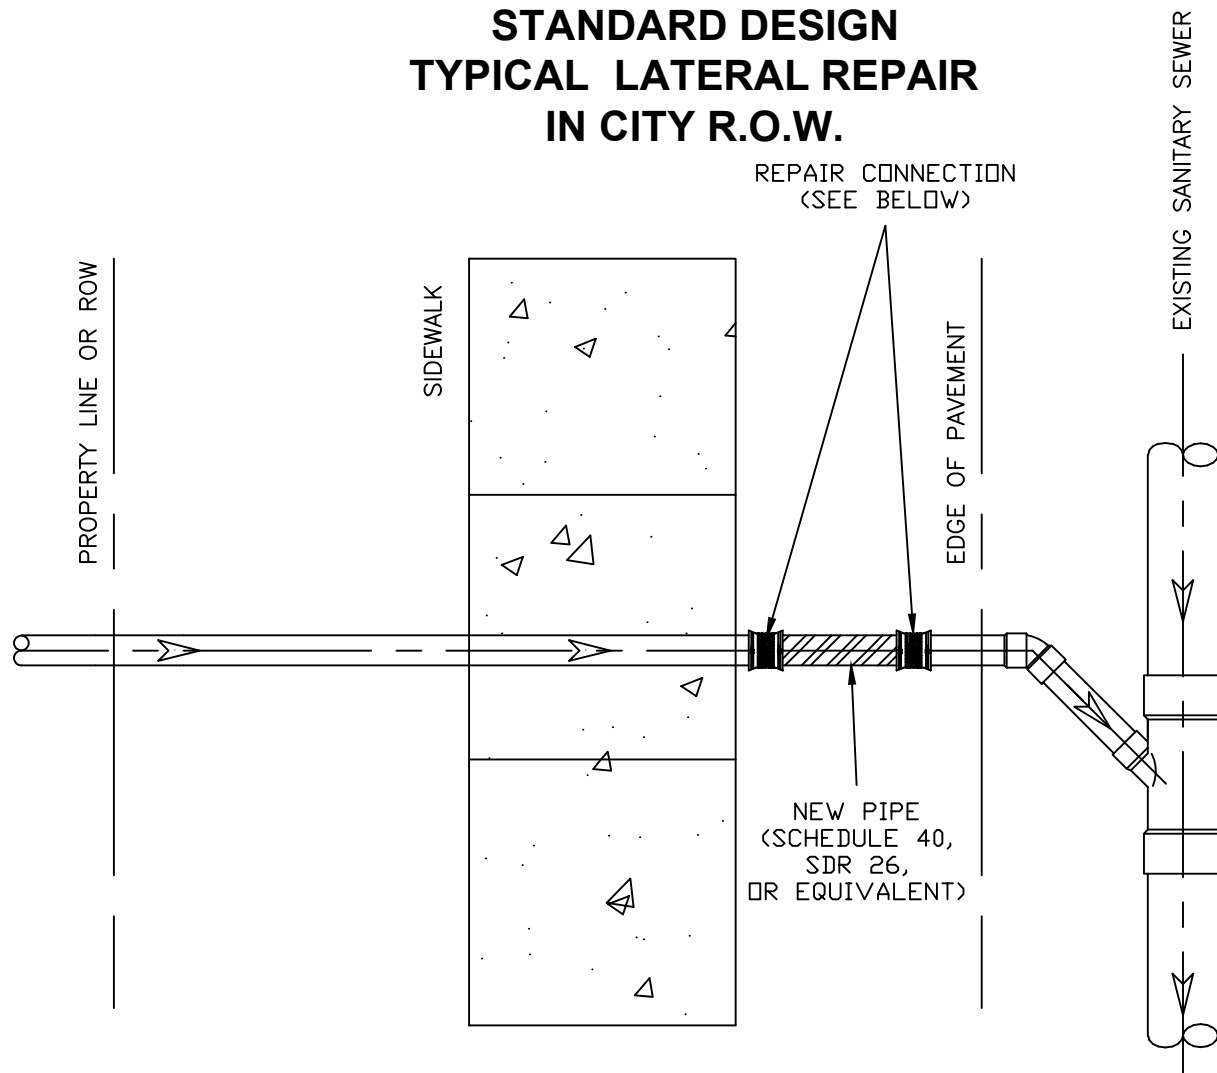

NOTES:

MORTAR SHALL NOT BE USED AS A REPAIR.


REPAIRS OTHER THAN THE TYPES SHOWN HERE MAY BE USED ONLY WHEN PRE-APPROVED BY THE CITY.

NEW PIPE AND REPAIR CONNECTION SHALL BE BEDDED AND BACKFILLED AS PER CITY STANDARD 2050.

WHEN EDGE OF TRENCH IS WITHIN 2' OF ANY PAVED AREA INCLUDING SIDEWALK, USE TRENCH BACKFILL AS PER CITY STANDARD 2050.

THE CONTRACTOR SHALL LEAVE THE REPAIR EXPOSED UNTIL CITY ENGINEERING CAN INSPECT WORK. THE REPAIR CAN BE COVERED ONLY AFTER ENGINEERING APPROVES THE WORK.

FOR MORE INFORMATION ON SANITARY SERVICES SEE CITY STANDARDS 2050, 2060, 2070, 2071, AND 2080.

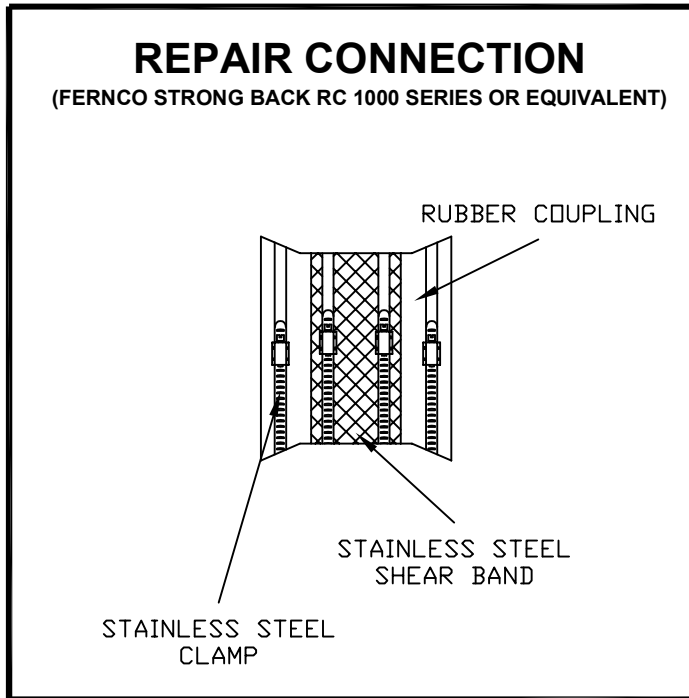

CITY OF DECATUR, ILLINOIS PUBLIC WORKS DEPARTMENT	ISSUED 2-20-19 REVISIONS BY DATE										
ADOPTED FEBRUARY 20, 2019 PUBLIC WORKS DIRECTOR	<table border="1" style="width: 100%; height: 40px; border-collapse: collapse;"> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </table>										